

FORMAX[®]

AutoSeal[®] FD 1500 PRESSURE SEALER

Standard Features

- **Drop-In Feed System:** A drop-in three roller feed system produces dependable feeding of forms with no paper fanning required
- **14" Form Length Capability:** Flexibility to process even and uneven panel forms up to 14" in length
- **Desktop Design:** A sleek desktop design made with office usage in mind
- **LED Indicators:** Notifies an operator when the power is on, a cover is open, the paper runs out and if a fault occurs
- **Fold Types:** Z, uneven Z, C, half folds and custom forms
- **Six-Digit Resettable Counter:** For maximum audit control

Options:

- **18" Conveyor w/ Photo Eye:** Allows for neat and sequential stacking
- **Locking Cabinet:** Fully enclosed for storage
- **402 Series Jogger:** Reduces static electricity and aligns forms for proper feeding
- **FD 1500-35 Reverse Stacking Conveyor:** Allows for A-to-Z input and A-to-Z output.



Shown with optional cabinet

The FD 1500 AutoSeal[®] is *The* low volume folder/sealer solution for processing one-piece pressure sensitive mailers. Built with proven Formax technology, the FD 1500 provides an economical solution with the quality and reliability you have come to expect from Formax. The sleek office design and ease of operation makes this unit ideal for processing documents in an office environment with low volume applications. A processing speed of up to 85 forms per minute enables operators to complete daily jobs with ease. The added capability of processing 14" forms gives the FD 1500 the versatility needed to fold and seal virtually any low volume application to meet your needs.

Formax
New Hampshire, USA
www.formax.com

LOCAL DEALER:

Flexible

The FD 1500 handles a variety of even panel forms up to 8 1/2" x 14" including checks, invoices, school reports, tax forms and appointment notices. Pressure seal mailers can be used for virtually any application that can be printed on one form. The extended fold plate processes uneven panel forms up to 8 1/2" x 14".

Dependable & Powerful


The FD 1500 is built with proven Formax technology. Heavy-duty steel construction offers the dependability and power expected of a larger unit in a smaller package. A processing speed of up to 85 forms per minute enables an operator to complete daily jobs in no time.



User Friendly Control Panel

Pressure Seal Solution

The AutoSeal® FD 1500, combined with a laser printer and pressure seal forms, creates a secure, time saving and efficient solution for paper processing.

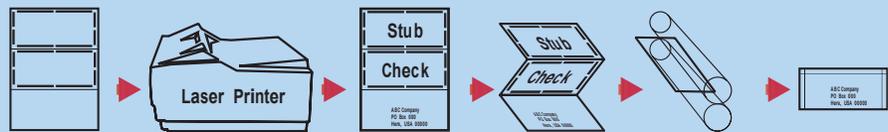

Standard "Z" Fold Process

Ease of Operation

The FD 1500 is designed for user friendly operation. Simply set your folds according to the clearly marked settings on the fold plates, load your forms using the drop-in feed system, press start and you're on your way. The FD 1500 has LED indicators for power on, fault detection, paper out and cover open. It also includes a six-digit counter for audit control.

Specifications:

Hopper Capacity:	Up to 150 sheets 24# (90gsm)
Fixed Speed:	Up to 85 sheets per minute - based on 11" (279mm) "Z" fold
Paper Size:	Up to 8.5" W x 14" L (216 W x 356 L mm)
Power:	FD Model: 120 Volts AC 50/60Hz FE Model: 220 Volts AC 50/60Hz
Duty Cycle:	Up to 20,000 per month
Dimensions:	24" L x 17" W x 13" H (61 L x 43 W x 33 H cm)
Weight:	82 lbs (37 kg)
Document Sequence:	Standard sequence is A-to-Z input, Z-to-A output. Optional FD 1500-35 reverse conveyor available for A-to-Z output.
Certifications:	UL and CUL approved CE applied for

U.S. Patents: 5,772,841 5,865,925 5,968,308 6,264,592 Other Patents Pending



A 402 Series Jogger is a recommended option that reduces static electricity from forms and aligns them for proper feeding